



30 SERIES

ICE STORAGE BINS

B530AP & B530SS



B430AP




B230AP



FEATURES:

- Durable one-piece rotomolded cabinet
- High-impact polyethylene liner
- Low profile, space saving design
- Corrosion proof
- Stainless steel door
- Environmentally friendly, non-CFC foam insulation
- All stainless steel exterior option available for B530SS

DIMENSIONS									
UNIT	A	B	C	D	E	F	G	H	I
B230AP	30" (76 cm)	23.87" (61 cm)	11.25" (29 cm)	23.50 (60 cm)	23.87 (61 cm)	30" (76 cm)	15" (38 cm)	0.75" (2 cm)	2.75" (7 cm)
B430AP	30" (76 cm)	26" (66 cm)	22.50" (57 cm)	38" (97 cm)	28.31" (72 cm)	32.31" (82 cm)	15" (38 cm)	0.75" (2 cm)	2.75" (7 cm)
B530AP	30" (76 cm)	26" (66 cm)	26.50" (67 cm)	48" (122 cm)	28.31" (72 cm)	32.31" (82 cm)	15" (38 cm)	0.75" (2 cm)	2.75" (7 cm)
B530SS	30" (76 cm)	26" (66 cm)	26.50" (67 cm)	48" (122 cm)	28.31" (72 cm)	32.31" (82 cm)	15" (38 cm)	Drain centered on bottom	Drain centered on bottom

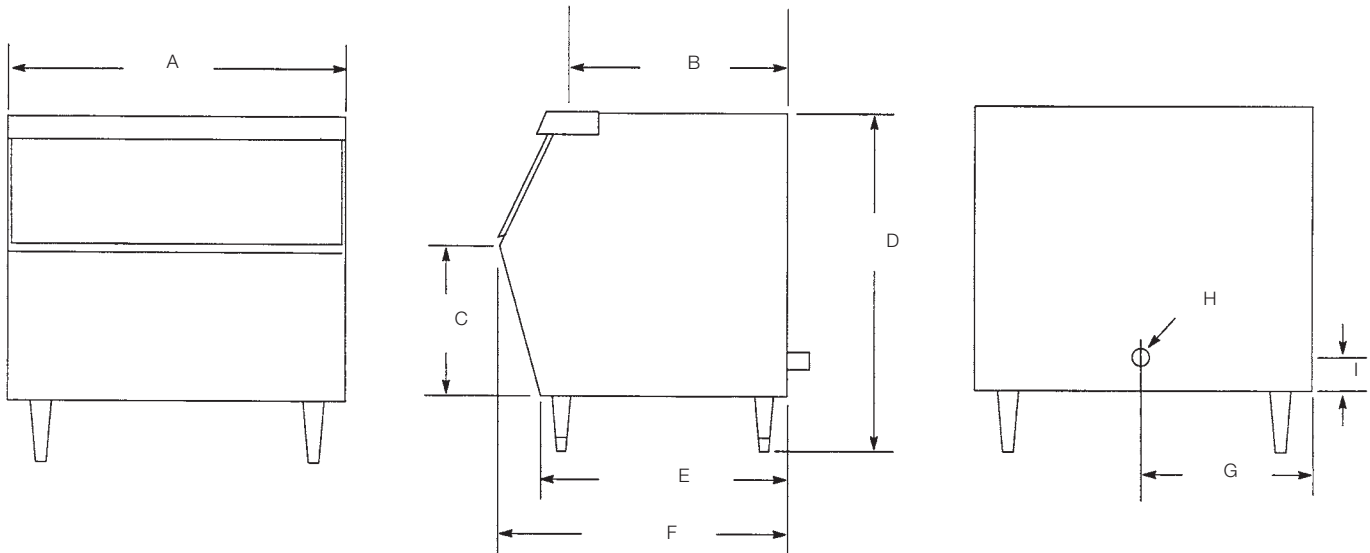

PART NUMBER	ARI CERTIFIED STORAGE CAPACITY*	ICE APPLICATION STORAGE CAPACITY	EMPTY WEIGHT	SHIPPING WEIGHT
B230AP	120 lb (54.44 kg)	140 lb (64 kg)	40 lb (18 kg)	54 lb (25 kg)
B430AP	290 lb (132 kg)	400 lb (182 kg)	68 lb (31 kg)	92 lb (42 kg)
B530AP	360 lb (163 kg)	500 lb (226 kg)	92 lb (42 kg)	108 lb (49 kg)
B530SS	400 lb (181 kg)	500 lb (226 kg)	92 lb (42 kg)	108 lb (49 kg)

* Certified in accordance with ARI Standard 820-88

TECHNICAL SPECIFICATIONS:

DRAIN CONNECTION 0.75" (2 cm) female fitting can be adapted to plastic, copper or galvanized drain line

CABINET FINISH B230, B430, B530AP: One piece gray polyethylene exterior/interior & stainless steel door
 B530SS: Stainless steel exterior with polyethylene bin liner & stainless steel door

WARRANTY 1 year parts and labor



IN THE U.S.A.
 Ph: 800.238.3600
 Fax: 800.258.0255

OUTSIDE THE U.S.A.
 Ph: 763.488.8200
 Email: webmaster@cornelius.com

101 Broadway Street West
 Osseo, MN 55369
 www.cornelius.com