

384

Frozen Uncarbonated Beverage (FUB) Freezer

Single Flavor

Features

Serve non-dairy frozen beverages, like cocktails, smoothies or frozen lemonade, fruit juices, coffees, cappuccino and tea. Pre-mix may be dispensed directly into a cup or blend flavors for more variety.

Freezing Cylinder

One, 10 quart (9.5 liter).

Mix Hopper

One, 12 quart (11.4 liter). An adjustable setting in the refrigeration system maintains mix temperatures in the hopper.

Indicator Lights

Add Mix light alerts the operator to add mix. When the Mix Out light flashes, the unit shuts down automatically to prevent damage.

Automatic Consistency Control

Refrigeration is regulated by monitoring viscosity. Adjustable control allows the operator to serve a wide variety of frozen beverages from regular slush to cocktails, pre-mix or neutral base, all at the desired thickness.

Flavor Cards

Four static cling flavor cards are provided: Frozen Drinks, Frozen Cocktails, Frozen Fruit Drinks and Margaritas.

Continuous Auto Fill System (Optional)


Mix supply to the hopper can be replenished automatically from a remote delivery system customized to suit your business by your local Taylor distributor.

Lighted Display (Optional)

Create even more attention with the optional lighted display.



384 Frozen Uncarbonated Beverage (FUB) Freezer

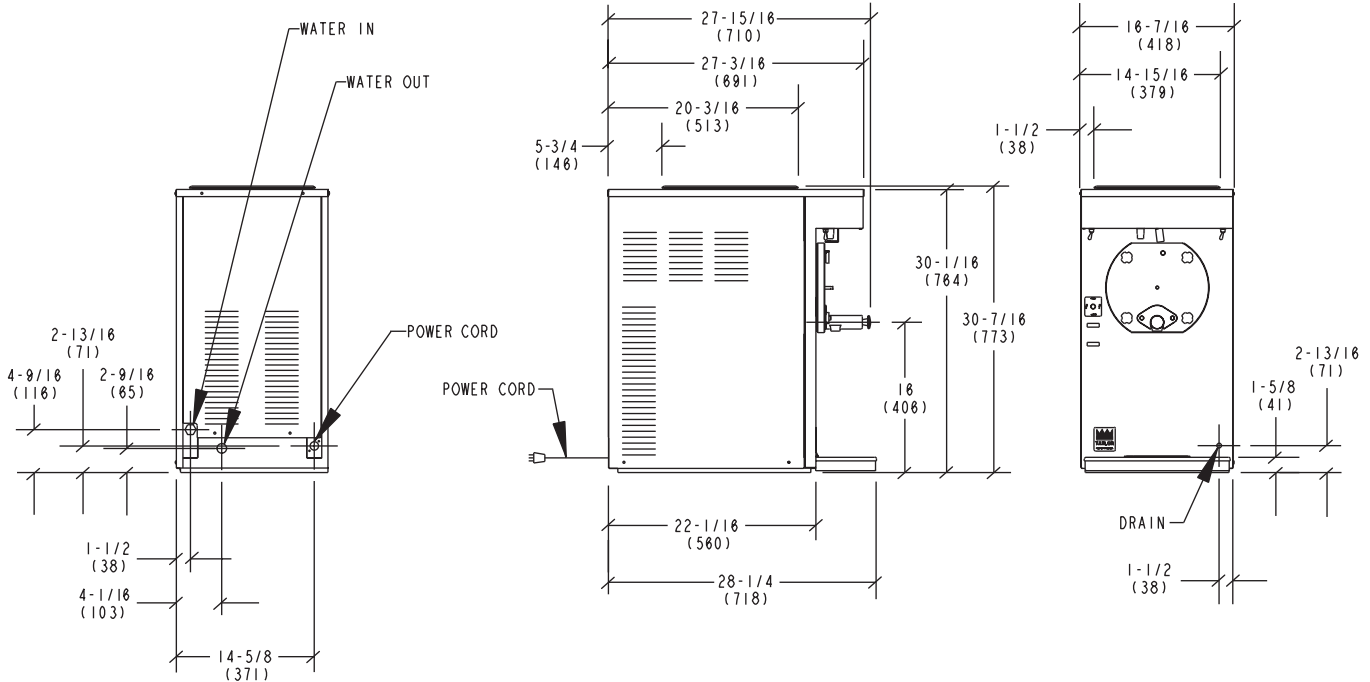

NOTE: DIMENSIONS IN PARENTHESES INDICATE MILLIMETERS

Weights	lbs.	kgs.
Net	243	110.2
Crated	275	124.7
	cu. ft.	cu. m.
Volume	14.5	0.40

Dimensions	in.	mm.
Width	16-7/16	418
Depth	28-1/4	718
Height	30-7/16	773
Counter Clearance	*	*

*Designed to rest on a plastic pad directly on counter top.

Electrical	Total Amps	Supplied with NEMA Cord
208-230/60/1 Water	9.3	6-15P
220-240/50/1 Water	6.9	----

This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability.
(For exact electrical information, always refer to the data label of the unit.)

Bidding Specs

Electrical: Volt _____ Hz _____ ph _____
Neutral: Yes No | Cooling: Air Water NA

Options: _____

Specifications

Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be cord connected. Consult the international Taylor distributor for cord & receptacle specifications for 50 Hz. equipment.

Beater Motor

One, 1/2 HP.

Refrigeration System

One, 11,000 BTU/hr compressor. R404A. (BTUs may vary depending on compressor used.)

Water Cooled

Water inlet and drain connections at the rear of unit 3/8" FPT.

Options

- Customized Mix Delivery System with Continuous Fill
- Lighted Front Display

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



Taylor Company,
A Division of Carrier Commercial Refrigeration, Inc.
Rockton, Illinois 61072
815-624-8333 800-255-0626 Fax 815-624-8000
www.taylor-company.com

Printed in U.S.A.

053624-ADV 6/06