



Item No. \_\_\_\_\_

# 390

## Frozen Uncarbonated Beverage (FUB) Freezer

Single Flavor

### Features

Serve non-dairy frozen beverages, like smoothies or frozen lemonade or cocktails, fruit juices, coffees, cappuccino and tea. Pre-mix directly into a cup or blend flavors for more variety.

#### Freezing Cylinder

One, 7 quart (6.6 liter).

#### Mix Hopper

One, 20 quart (18.9 liter). An adjustable setting in the refrigeration system maintains mix temperatures in the hopper.

#### Indicator Lights

The Add Mix Light flashes to alert the operator to add mix. When the Mix Out Light flashes, the unit shuts down to prevent damage.

#### Electronic Viscosity Control

Refrigeration is regulated by measuring product viscosity. Adjustable control allows the operator to serve a wide variety of frozen beverages at the desired thickness.

#### Continuous Auto Fill System (Optional)

Mix supply to the hopper can be replenished automatically from a remote delivery system customized to suit your business by your local Taylor distributor.




Rockton, Illinois 61072  
**800-255-0626**  
Phone 815-624-8333 Fax 815-624-8000  
**www.taylor-company.com**  
e-mail: info@taylor-company.com

International Office  
Taylor Company S.r.l.  
Roma, Italy  
Tel: **+39-06-420-12002** Fax: +39-06-420-12034  
e-mail: romeoff@taylor-company.com

ISO 9001:2000  
Registered Firm

# 390 Frozen Uncarbonated Beverage (FUB) Freezer

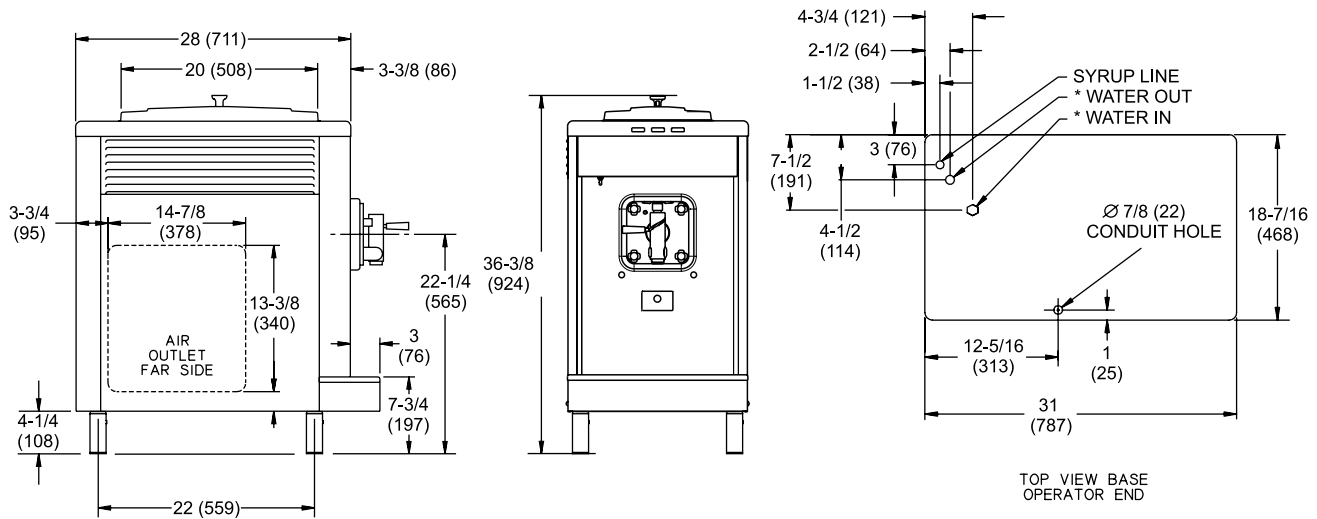

NOTES:  
 1. FIGURES IN PARENTHESES INDICATE MILLIMETERS.  
 2. \* NOTES FOR WATER COOLED UNITS ONLY.

Weights	lbs.	kgs.
Net	282	127.9
Crated	308	139.7
	cu. ft.	cu. m.
Volume	16.3	0.46

Dimensions	in.	mm.
Width	18-7/16	468
Depth	31	787
Height	36-3/8	924
Counter Clearance	4-1/4	108

\*Mounted on standard legs

Electrical	Maximum Fuse Size	Minimum Circuit Ampacity	Poles (P) Wires (W)
208-230/60/1 Air	20	15	2P 3W
208-230/60/1 Water	20	14	2P 3W
208-230/60/3 Air	15	11	3P 4W
208-230/60/3 Water	15	10	3P 4W
220-240/50/1 Air	15	12	2P 3W

*This unit may be manufactured in other electrical characteristics. Refer to the local Taylor Distributor for availability. (For exact electrical information, always refer to the data label of the unit.)*

## Bidding Specs

Electrical: Volt \_\_\_\_\_ Hz \_\_\_\_\_ ph \_\_\_\_\_  
 Neutral:  Yes  No | Cooling:  Air  Water  NA

Options: \_\_\_\_\_  
 \_\_\_\_\_

## Specifications

### Electrical

One dedicated electrical connection is required. See the Electrical chart for the proper electrical requirements. Manufactured to be permanently connected. Consult your local Taylor distributor for cord & receptacle specifications as local codes allow.

### Beater Motor

One, 1/2 HP

### Refrigeration System

One, 7,500 BTU/hr. R404A.  
 (BTUs may vary depending on compressor used.)

### Air Cooled

Minimum Clearance: 6" (152 mm) on both sides. Place the rear of the unit against the wall to prevent recirculation of warm air. Minimum air clearances must be met to assure adequate air flow for optimum performance.

### Water Cooled

Water inlet and drain connections under side of base 3/8" FPT.

## Options

- Customized Mix Delivery System with Continuous Fill
- Panel Spinner

Continuing research results in steady improvements; therefore, these specifications are subject to change without notice.



**Taylor Company,**  
 A Division of Carrier Commercial Refrigeration, Inc.  
 Rockton, Illinois 61072  
 815-624-8333 800-255-0626 Fax 815-624-8000  
[www.taylor-company.com](http://www.taylor-company.com)

Printed in U.S.A.

047244-ADV 6/05